


PORTABLE **SYSTEM**

Junckers sports floor system




- flexible system with alternate performance (depending on subfloor)
- unique ball bounce
- individual logo and event branding
- line marking to match specific sports events
- TV-friendly
- pre-assembled solid hardwood floor boards
- ergonomic light weight pre-assembled panels with lock fittings
- quick and easy to assemble and disassemble
- installation even on top of ice rink
- easy storage and transportation
- easy maintenance

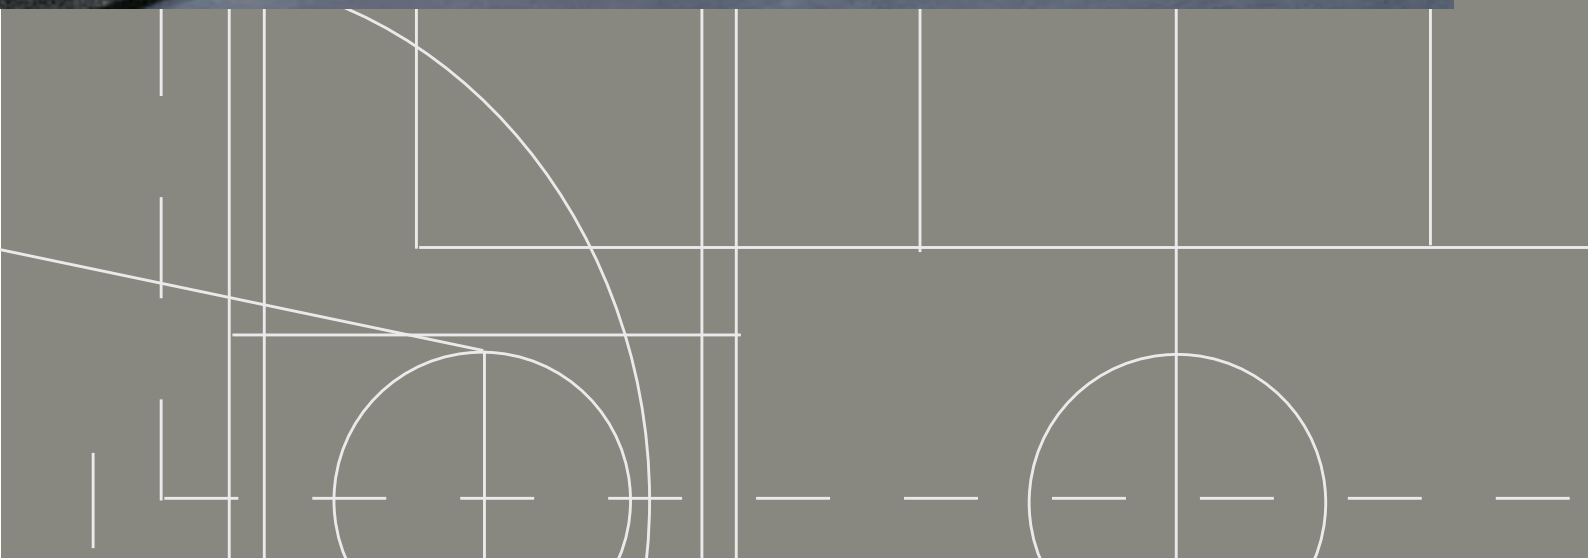

Junckers Industrier A/S
 Værftsvej 4 | DK-4600 Køge
 tel. +45 56 65 18 95
 fax. +45 56 67 35 58
 junckers@junckers.dk
 www.junckers.com

system components

Construction height: 27 or 32 mm

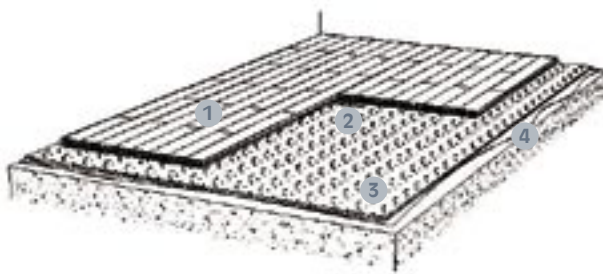

1. Floor elements:
1/1 elements 513 x 1800 mm
1/2 elements 513 x 900 mm
2. Fittings
3. Intermediate layer
(5 or 10 mm resilient foam)
4. 0.20 mm PE-membrane
(moisture barrier)

NB: Z-trim available for framing the floor

Installation on even subfloor

JUNCKERS PORTABLE SYSTEM - PERFORMANCE

The portable sports floor system offers the ultimate in terms of flexibility for arenas and halls that play host to a wide variety of sporting and non-sporting events. In situations where specific line-markings are required, Junckers portable sports floor system provides the perfect solution, e.g. for TV transmissions.

Installation is simple and very fast. The system requires an underlay to provide shock absorption and resilience and to protect the existing floor. Once the underlay is in position the sports floor is laid. Panels are held securely in position with practical fittings that are easy to release when the system is disassembled.

The construction height of a Junckers portable sports floor system is either 27 or 32 mm depending on underlay used.



The unique fitting that holds the panels locked together - on the back of the boards.



Plastic loose tongues guarantee a stable, safe and even floor surface.

Performance	DIN 18032 test requirement	Test results *)
Shock-absorption	Min. 53%	42%
Vertical deformation	Min. 2,3 mm	1,5 mm
Ball bounce	Min. 90%	100%
Friction	0,4 - 0,6	> 0,4
Rolling load	Min. 1500 N	> 1500 N

*) The actual performance depends on the subfloor characteristics. Test figures correspond to a 10 mm foam on concrete. If installed on existing sports floor test results will reflect the combined figures (between subfloor and portable floor).

for more information about Portable System and other Junckers sports floor systems www.junckers.com