




RealOakFloors - Forest FX

Developed from authentic reproductions of wood flooring
 Collection of 14 wood designs
 Polyurethane reinforced to aid ongoing maintenance

Specification



Just 2mm thick



2m x 20m = 40m² roll




0.70mm top layer



2700g/m²



EN 649:
1996
AS 2055.1
Sheet

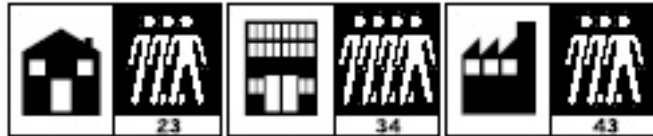

EN 13501-1 Class Bfl-S1



Class D (dry condition)
AS/NZS 4586 R9



EN 423 (ASTM F 1303-99)
Excellent chemical
resistance



ISO 105-B02 (Method3)
≥6



EN 649: 1996 Group T



EN 433 <0.10mm



EN 434 <0.40%



EN 435 Method A Pass
20mm Ø



EN 425 Pass
Suitable for castor chairs



Suitable (Max 27°C)



EN1815 This product does not accumulate static charges above 2kV and is classified as antistatic. For specialist applications where there is a requirement to dissipate the electrostatic charge, see the Polyflor ESD product ranges.




For information regarding handling and installation, adhesives, maintenance and applications please don't hesitate to contact us. the date of issue the data presented is correct.

However, Polyflor Ltd. reserves the right to make changes which do not adversely affect performance or quality.

FOREST FX WOODROLL FLOORS MAY INCLUDE KNOTS OR MARKINGS AS PART OF THE DESIGN.


14 Fantastic Colours



American Oak




Canadian Maple




Cherry




Classic Beech




Cocobolo




European Oak




Golden Maple




Mahogany




Rich Cherry



Rustic Oak



Silver Oak



Teak



Walnut



Warm Beech

Real Oak Floors
Unit 10,
Penraevon Industrial Estate
Penraevon Street
Meanwood Road
Leeds
LS7 2AW

www.RealOakFloors.co.uk
Tel: 08700 116 914
Fax: 08709 503 019

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.